

# ES21-SA11H1

ES21

**SAFETY COMMAND DEVICES** 





# Ordering information

Туре	Part no.
ES21-SA11H1	6036751

Other models and accessories → www.sick.com/ES21



#### Detailed technical data

#### **Features**

Number of positive action N/C contacts	2
Number of N/O contacts	1
Actuation directions	1
Emergency stop pushbutton (illuminable)	✓
Obstruction protection	✓
Release type	Rotary release

## Safety-related parameters

<b>B<sub>10d</sub> parameter</b> 2.5 x 10 <sup>5</sup> switching cycles	B <sub>10d</sub> parameter	2.5 x 10 <sup>5</sup> switching cycles
---	----------------------------	--

#### Interfaces

Connection type	Cable gland, 2 x M20
Conductor cross-section	≤ 2.5 mm²
Contact	Screw connection

#### Electrical data

#### Operating data

Protection class	II (EN 50178)
Switching principle	Slow action switching element
Number of positive action N/C contacts	2
Number of N/O contacts	1
Usage category	AC-15/DC-13 (EN 60947-5-1)
Rated operating current (voltage)	3 A (250 V AC) 2 A (24 V DC)
Rated current (voltage) according to EN 61058-1	16 A (10 A) 250 V AC 10 A (6 A) 440 V AC
Rated insulation voltage U <sub>i</sub>	600 V
Switching voltage	≥ 5 V DC
Switching current	≥ 1 mA

 $<sup>^{1)}</sup>$  At rated load.

Electrical life	1 x 10 <sup>6</sup> switching cycles <sup>1)</sup>

<sup>1)</sup> At rated load.

#### Illumination

Supply voltage $V_{\rm s}$	24 V DC (12 V DC 30 V DC)
Power consumption	8 mA 44 mA
Life time	70.000 h <sup>1)</sup> 100.000 h <sup>2)</sup>

<sup>&</sup>lt;sup>1)</sup> At 55 °C, 20 mA. <sup>2)</sup> At 25 °C, 20 mA.

#### Mechanical data

Weight	230 g
Housing material	Plastic
Mounting version	Surface mount version

## Ambient data


Enclosure rating	IP54 (IEC 60529)
Ambient operating temperature	-25 °C +55 °C
Storage temperature	-25 °C +85 °C

## Classifications

ECI@ss 5.0	27371228
ECI@ss 5.1.4	27371228
ECI@ss 6.0	27371244
ECI@ss 6.2	27371244
ECI@ss 7.0	27371244
ECI@ss 8.0	27371244
ECI@ss 8.1	27371244
ECI@ss 9.0	27371244
ETIM 5.0	EC002034
ETIM 6.0	EC002034
UNSPSC 16.0901	39121545

## Dimensional drawing (Dimensions in mm (inch))

Surface mount version

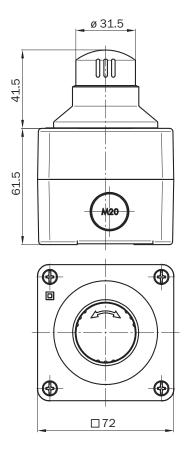

# SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

# **WORLDWIDE PRESENCE:**

Contacts and other locations -www.sick.com

