
Γ	IIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDU					
	Material	High Conductivity Seamless Copper Tube				
	Plating	Electro-Tin				

Material	High Conductivity Seamless Copper Tube		
Plating	Electro-Tin		
Wire Size	2 AWG		
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric		
Wire Strip Length	1-1/4 in.		
Stud Size	5/16 in.		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.		
UL Temperature Rating	90°C		
C.S.A Certified Wire Connector	Yes		
Panduit Color Code on Barrel	BROWN		
Panduit Die Index No. on Barrel	P33		
Alternate Industry Die Index No. () on Barrel	(10)		





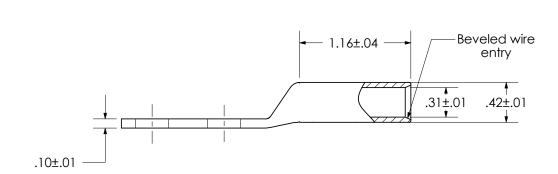

3.02±.06 -

2 STR CU LCC2-56B

-- .75±.02 →

.66±.04

.32±.04 -

.44 R Ref

PANDUIT

.34±.02 DIA (2) PLS Color coded barrel markings

						PANDUIT CORP. TINLEY PARK, ILLINOIS
						LCC2-56B-Q
01	11/10	JHNU	JHNU	removed navy number from stamp		Copper Lug - Two-Hole, Long Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCC2-56B-CUST