

NOTES:


1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 MAXIMUM INPUT POWER: 2 WATTS AVG. @ +25°C
DERATED LINEARLY TO 1 WATT @ +125°C
- 1.3 OPERATING & STORAGE TEMP. RANGE:
-65°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.05 +0.008f(GHz) MAX.

2.0 MARKING:

MARK UNIT AS SHOWN
(REF.: INK-02639-27-03)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

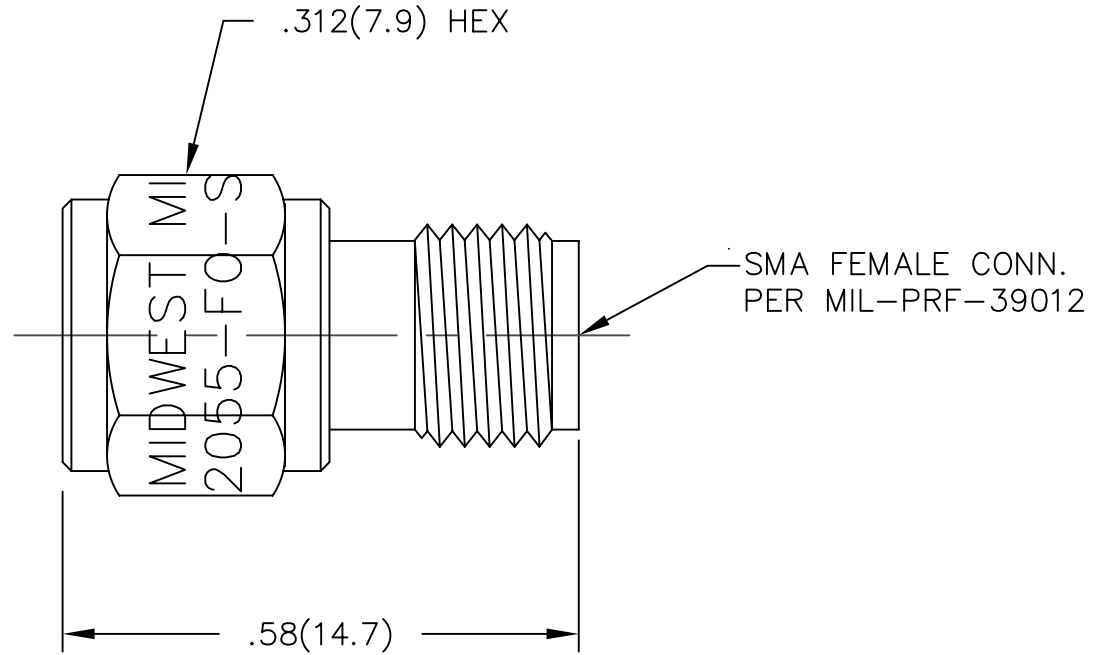

DWG NO. WAS: 01934-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	12/11/89
A	ECR 4109	1/7/86
B	ECR 6545	2/29/89
C	ECR 6939	12/23/89
C1	REDRAW ON CAD	9/4/91
D	ECN 11825	5/18/92
E	ECN 12132	10/14/92
F	ECN 12132	11/19/93
F1	ADDED TITLEBLOCK	10/27/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
3 PLACE DECIMALS ±.005
2 PLACE DECIMALS ±.02
FRACTIONS ±1/64
PARALLELITY: T.I.R. _____
FLATNESS: T.I.R. _____
CONCENTRICITY: T.I.R. _____
ANGLES AND PERPENDICULARITY: ±1°

CASE CODE 34078		MIDWEST MICROWAVE	
 EMERSON Network Power Connectivity Solutions		TITLE TERMINATION OUTLINE DRAWING	
		DRAWING NUMBER TRM-2055-F0-SMA-02-01	REV. F1
DRAWN/DATE A.BEATTY 9/4/91	ENG./DATE G.KOZAK 9/5/91	SCALE: 5=1 SHEET 1 of 1	
CHECKED/DATE C.RICKARD 9/15/92	APPROVED/DATE		