

NOTES:

1.0 SPECIFICATIONS:


- 1.1 FREQUENCY RANGE: DC to 500 MHz
- 1.2 MAXIMUM INPUT POWER:
 - +25°C 2 WATTS
 - +125°C 0.5 WATTS
- 1.3 OPERATING TEMPERATURE RANGE:
 - 55°C to +125°C
- 1.4 MAXIMUM VSWR: 1.25:1
- 1.5 IMPEDANCE: 50 OHMS

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN
(REF.: INK-02640-27-01)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

BNC MALE CONN.
PER MIL-PRF-39012

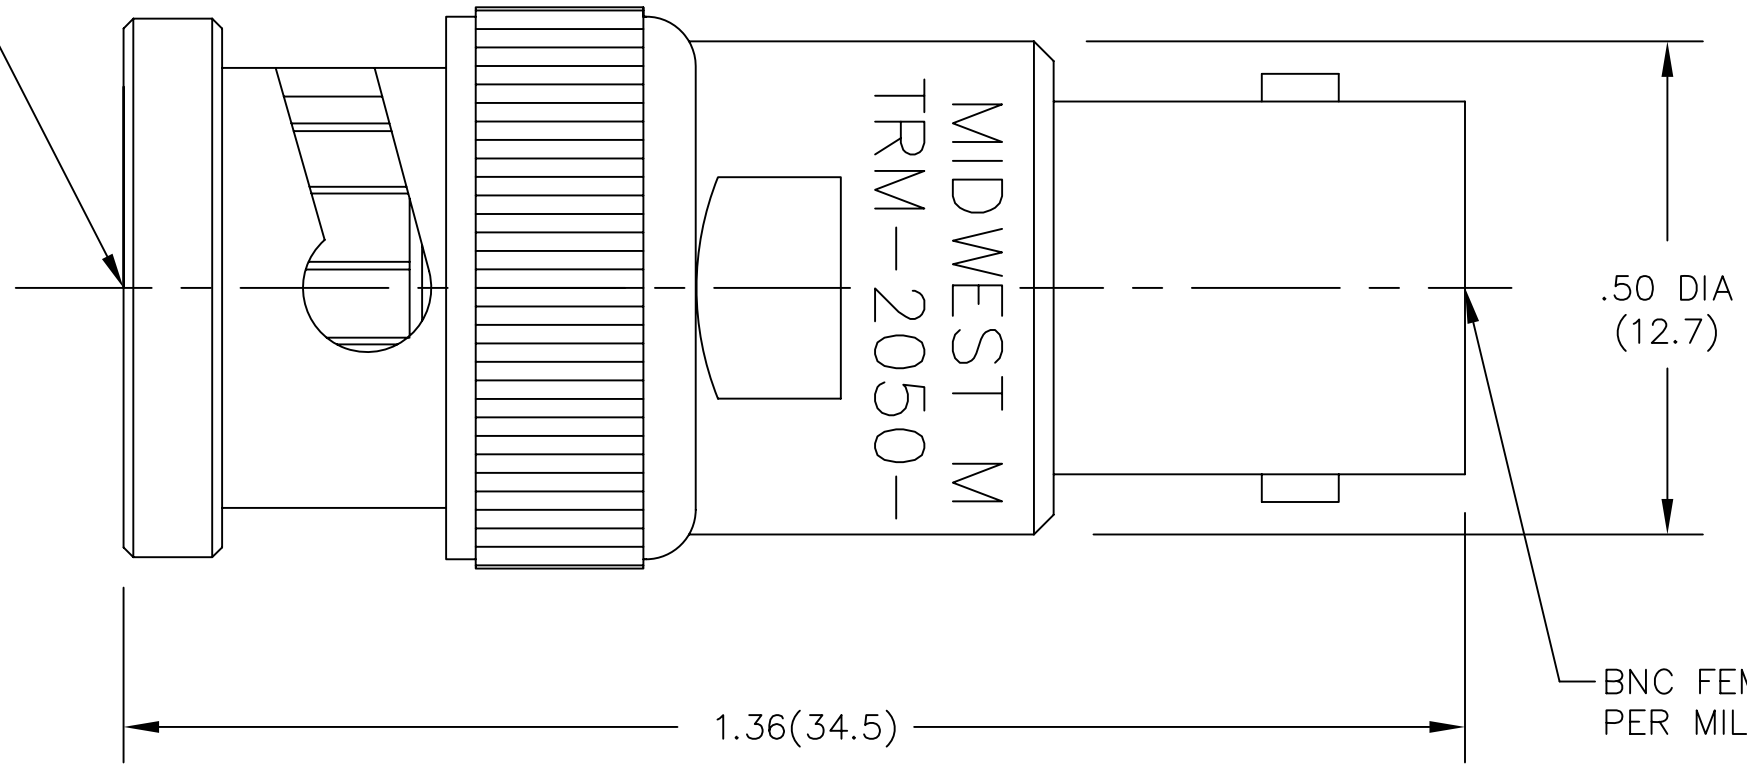

BNC FEMALE CONN.
PER MIL-PRF-39012

TRM-2050-00-BNC-10 AND TRM-2050-MF-BNC-10
ARE IDENTICAL, MARKING SHOULD MATCH MODEL NO.
AS IT APPEARS ON PURCHASE ORDER.

DWG NO. WAS: 07146-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/24/87
A	ECR 6545	8/1/89
B	ECN 11402	1/10/92
C	REDRAW ON CAD	4/29/93
D	ECN 13150	11/19/93
D1	ADDED TITLEBLOCK	10/26/05

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. 34078	MIDWEST MICROWAVE		
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave	TITLE TERMINATION		
	DRAWN/DATE A.BEATTY 4/22/93	ENG./DATE A.OSGA 4/30/93	DRAWING NUMBER TRM-2050-MF-BNC-10	
	CHECKED/DATE M.HOLLMAN 4/29/93	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1

MODEL NUMBER
TRM-2050-MF-BNC-10
REV.
D1